

REMARKS

The specification of the subject U.S. patent application, as constituted by the verified translation of PCT/EP2004/050656, has been cancelled in favor of the currently filed Substitute Specification. An Abstract of the Disclosure has been added. These do not constitute any new matter.


Original claims 1-27 have been cancelled and new claims 28-54 have been added. New claims 28-54 are essentially the same, in scope, as the claims pending in the PCT application. They have been rewritten in a form more in accordance with U.S. practice and eliminating multiple dependencies.

Entry of this Preliminary Amendment prior to the calculation of the filing fee, and prior to an examination of the application on the merits is respectfully requested.

Respectfully submitted,

Michael HELD
Sebastian Alois PRÜM
Applicants

JONES, TULLAR & COOPER, P.C.
Attorneys for Applicants

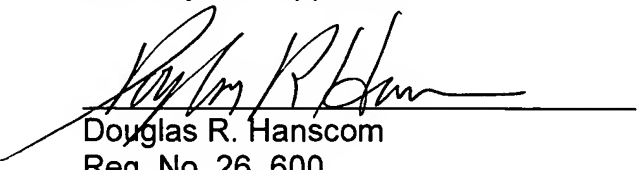

Douglas R. Hanscom
Reg. No. 26, 600

November 2, 2005
JONES, TULLAR & COOPER, P.C.
P.O. Box 2266 Eads Station
Arlington, Virginia 22202
(703) 415-1500
Attorney Docket: W1.1957PCT-US

[WO 2004/096687]

[PCT/EP2004/050656]

MARKED-UP COPY OF SPECIFICATION

W1.1957 PCT-US: HELD, PRÜM

[Specification]

**ROTARY FOLDER COMPRISING A CUTTING DEVICE FOR CROSS-CUTTING
AT LEAST ONE WEB**

CROSS-REFERENCE TO RELATED APPLICATIONS

[001] This patent application is the U.S. national phase, under 35 USC 371, of PCT/EP2004/050656, filed April 30, 2004; published as WO 2004/096687 A1 on November 11, 2004, and claiming priority to DE 103 19 774.5, filed May 2, 2003, the disclosures of which are expressly incorporated herein by reference.

FIELD OF THE INVENTION

[002] The present invention is directed[relates] to a wheel folding apparatus with a cutting device for accomplishing the transverse cutting of at least one web of material[in accordance with the preamble of claim 1] The device includes a transport cylinder with two folding rollers that form a folding gap.

BACKGROUND OF THE INVENTION

[003] A[Such a] wheel folding apparatus is typically employed, for example, [in order]to separate paper webs, which have been imprinted in a web- fed rotary

printing press, into individual signatures by use[means] of a[the] cutting device, and to fold the individual signatures[.].

[004] Generally known[Known] wheel folding devices of this type usually comprise cutting devices which are provided with a transport cylinder and with a cutting cylinder, which cylinders are mutually rotatable and which define[delimit] a gap through which a conveying path for the web of material to be cut extends.

The cutting cylinder supports at least one cutter, each which cutter cuts respectively one signature off the web of material when it passes through the gap.

[005] DE 25 17 000 C2 shows a folding apparatus with a spur cylinder and with a cutting blade cylinder, which cooperate to form a single cutting gap.

[006] DE 35 27 710 A1 and EP 0627 310 A1 both disclose folding apparatus. Two[, wherein two] folding blade cylinders work together with a folding jaw cylinder. A single cutting cylinder is assigned to each one of these folding blade cylinders.

SUMMARY OF THE INVENTION

[007] The object of the present invention is directed to providing[based on

creating] a wheel folding apparatus with a cutting device for transverse cutting of at least one web of material.

[008] In accordance with the present invention, this object is attained by[means of the characteristics of claim 1] the provision of the folding apparatus with a transport cylinder and with two folding rollers that are arranged to form a folding gap. The transport cylinder cooperates with two sequentially located counter cylinders to form first and second cutting gaps.

[009] The advantages which can be obtained by [means of]the present invention lie, in particular, in that with only a small[little] outlay for apparatus, the present invention[it] makes possible the combining of two webs of material, which two material webs are fed to the cutting gaps on two transport carriages, into a common product. The present invention also[, or that it] allows the processing of a web of material, with a very large number of layers, by combining two partial webs.

[010] Processing of webs of materials, which are composed of a large number of layers, by the use[means] of a folding apparatus with a single cutting gap, such as is described in DE 25 17 000 C2, entails difficulties for several reasons. For

one, traction rollers, which are customarily provided for use in setting a required tension in the web of material, act directly [act]on only [on]the respectively outermost layers of the web of material. The[, their] force exerted by such traction rollers is only indirectly transmitted to the inner layers of the web of material by friction of the layers of material against each other. These frictional forces are not accurately controllable, particularly[in particular] if it is necessary to guide the web around curves, such as, for example,[i.e.] to loop it around a roller. Therefore, the tension of the inner layers of such a web are[is] harder to control, the greater the number of layers there are[rollers is]. Also, the forces required for processing a web, either[be it] during cutting of the web or during pushing of the spur points into the web, are all the greater, the greater the number of layers there are[is].

With the wheel folding apparatus in accordance with the present invention, it is possible to combine a product with a defined number of pages from several partial webs, which had been cut separately of each other and placed on the spurs.

Since the forces required for cutting these partial webs and, if required, for placing these partial webs[them] on spur points, are less than the corresponding forces

that are required when processing a single web with the same defined number of pages, the wheel folding apparatus of the present invention can be constructed lighter and therefore more cost-[]effectively, without any loss in quality, compared with prior devices.

[011] Further advantages of the wheel folding apparatus of the present invention include[lie in] that the cutting device eliminates the danger of re-cutting already separated signatures, in the course of a further passage of such signatures through a cutting gap. This is accomplished[,] without requiring elaborate shifting devices, or an extraordinarily high degree of precision when controlling the rotations of the individual cylinders of the cutting device[for this].

[012] To prevent the second cutting blade from again cutting through the first web, during the passage of the web through the second cutting gap, the rotation of the two cutting cylinders is preferably synchronized. During[in such a way that during] its passage through the second cutting gap, the second cutting blade engages a cut which was formed[created] by the first cutting blade of the first web.

[013] To make the engagement of the second cutting blade with this previously

made cut easier, assemblies[means] are preferably provided for use in moving apart the cut edges of the first web that were generated by the first cutter in the course of cutting the first web. During[it, so that during] its passage through the gap, the second cutter encounters a gap of non-vanishing width that has been formed in the first web.

[014] In an embodiment of the wheel folding apparatus in accordance with the present invention, in which the cutting cylinder in the cutting device also takes on the function of a transport cylinder for the separated products, the single signature is located between the two cutters, by which it had been cut, so[as] long as it is maintained on the cutting or the transport cylinder. It[, and it] is sufficient, during this time, that the cutters and the signature do not move in relation to each other. This is done[,] in order to assure that the signature is not cut again in the course of another passage of the signature through the cutting gap.

BRIEF DESCRIPTION OF THE DRAWINGS

[015] Preferred[Exemplary] embodiments of the present invention are represented in the drawings and will be described in greater detail in what follows.

[016] Shown are in:

Fig. 1, a schematic side elevation[lateral plan] view of a portion of a wheel folding apparatus with a cutting device in accordance with the present invention, in

Figs. 2 to 5, respectively partial sectional views of the transport cylinder and of one cutting cylinder in different embodiments of the present invention, in

Fig. 6, a schematic side elevation[lateral plan] view of a portion of a different embodiment of a wheel folding apparatus with a cutting device in accordance with the present invention, in

Fig. 7, an enlarged representation of a detail of a portion of the device shown in Fig. 6, in

Fig. 8, a schematic representation of a mode of operation, in

Fig. 9, a schematic representation of another mode of operation, and in

Fig. 10, a further preferred[exemplary] embodiment of a wheel folding apparatus in accordance with the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[017] A schematic side elevation[lateral plan] view of a portion of a wheel

folding apparatus in accordance with the present invention is represented in Fig.

1. This wheel folding apparatus has two inlets 01, 02 for multi-layered webs 03, 04 of material, and in particular for paper webs 03, 04, which will be called inner or outer web 03, 04, respectively, in what follows. Both webs 03, 04 pass through [respective]traction roller pairs 06, 07, respectively, for setting their tension. Both of these webs 03, 04[and] meet a transport cylinder 11 at the heights[respective height] of cutting gaps 08, 09, respectively, between the transport cylinder 11, on the one hand, and one of two[the] cutting cylinders 12, 13 on the other. Instead of two such inlets 01, 02 and two cutting gaps 08, 09, it is also possible to provide three or more of each. In the course of this passage, the webs 03, 04 preferably first make contact with the respective cutting cylinder 12, 13 and subsequently make contact with the transport cylinder 11. The[, the] webs 03, 04 first loop around the cutting cylinder 12, 13 and then loop or wrap around the transport cylinder 11.

[018] Each cutting cylinder 12 or 13 has a circumference corresponding to at least one, and preferably to two lengths of the signatures 21, 27 to be produced

from the webs 03, 04, and each cutting cylinder 12 or 13 supports two cutters 14, as may be seen more clearly in Fig. 2.

[019] The circumference of the transport cylinder 11 corresponds to more than five, and in particular corresponds to seven lengths of the signatures 21, 27.

Seven counter-cutting strips, which may be, for example, hard rubber strips, and which are inserted at equal spaced circumferential distances into the circumferential face of the transport cylinder 11, are used as stops 33. Each, each] of these stops 33[which] works together with a cutter 14 when cutting the webs 03, 04. A holding device 16 is arranged at the transport cylinder 11 adjoining each one of the stops 33, and may be, for example, a spur strip 16 with extendible spur needles 23, as may be seen in [(see]Figs. 2 to 5[)].

[020] In the position of the folding apparatus represented in Fig. 1, a cutter 14 of the cutting cylinder 12 and a stop 33 of the transport cylinder 11 are shown as passing[just pass] through the first cutting gap 08, and cooperate, in the process, to cut the inner web 03. The leading edge of the inner web 03, which is formed [created] during this[the] cutting, has been speared or impaled on the spur

needles 23 of a spur strip 16 which spur strip 16 had been extended immediately prior to its reaching the cutting gap 08. These spur needles 23[, and] continue to hold the leading edge of the inner web 03[it] firmly on the surface of the transport cylinder 11 during further transport of the inner web 03.

[021] The signature 21, which has now been cut off from the inner web 03 in this way, [03] is conveyed on the transport cylinder 11 to the second cutting gap 09, where the outer web 04 is placed on top of it. The outer web 04 [and] is also speared or impaled by the spur needles 23 of the spur strip 16.

[022] The rotations of the two cutting cylinders 12, 13 are[is] synchronized in such a way that a cutter 14 of the second cutting cylinder 13 always passes through the second cutting gap 09 simultaneously with the passage of a small gap that has been formed between two successive signatures 21 which were cut from the inner web 03, and the passage of a stop 33 through gap 09. Different techniques for forming[creating] this gap will be explained in what follows with the aid of, and with reference to, Figs. 2 to 5.

[023] In the example represented in Fig. 1[here], an[the] angular distance

between the two cutting gaps 08, 09 is approximately 50°. This angular distance can differ from an[the] angular distance between the spur strips 16 from each other of approximately [(]51.5°[)] or a multiple thereof. Cutting[, so that cutting] is thus not performed simultaneously at both of the cutting gaps 08, 09. Even[; even] a half- number multiple of this value is disadvantageous from the point of view of avoiding vibrations.

[024] Following its[the] passage through the second cutting gap 09, each spur strip 16 supports a total product which is [respectively]composed respectively of a signature 21 cut off from the inner web 03, and a signature 27 cut off from the outer web 04. Seven products are formed during[created with] each revolution of the transport cylinder 11. This is[,] the same result as if both webs 03, 04 had been brought along in the customary manner through[via] a common inlet 01, 02. Since[But since] the cutting off of each individual signature 21, 27 is spread over two cutting steps at the two spaced cutting gaps 08, 09, the force which must be employed in each cutting step is less. This means that a[, and] satisfactory, more even running of the machine can be more easily maintained.

[025] Two[Furthermore, two] cylinders 17 and 18, and in particular two folding rollers 17 and 18, which together form a gap 19, and in particular which form a folding gap 19, have been placed, in a contactless manner, against the cutting and transport cylinder 11. Seven folding blades, which are not specifically represented in Fig. 1, are attached to the transport cylinder 11, each of which folding blades is extended when reaching the folding gap 19 between the folding rollers 17, 18 [transport cylinder 11] in order to push the products, which are being transported on the transport cylinder 11, and in a manner that is known per se, into the folding gap 19, with the products leading with a desired fold line that is located approximately centered on the sides of the signatures 21, 27, and to fold them in this way. The folded products pass through the folding gap 19 and, in a generally known manner, fall onto a paddle wheel, which is not specifically represented, and are placed by the paddle wheel[it] on a conveyor belt.

[026] Fig. 2 shows a detailed view of the second cutting gap 09 and its surroundings, in accordance with a first preferred embodiment of the present invention. Two of the seven spur strips 16 of the transport cylinder 11 are

represented in Fig. 2 and are identified as spur strips 16', 16". Each of these spur strips 16', 16"[them] is pivotable around a shaft 22 in a controlled manner and has spur needles 23 which are oriented in such a way that their respective tips, which are extending radially from the circumference of the transport cylinder 11, are farther away from the center of the shaft 22 than are their bases, which are located inside the transport cylinder 11. The spur needles 23 of the spur strip 16' are depicted in Fig. 2 as being situated in a comparatively far extended position, in which extended position they had also previously passed through the first cutting gap 08. This identical position is shown by dashed lines at the location of the spur strip 16".

[027] In comparison with this extended position of the spur strip 16', the spur strip 16" has been pivoted back some distance into the interior of the transport cylinder 11. This pivot movement causes a displacement of the intersection point between the spur needles 23 and the surface of the transport cylinder 11 in a circumferential direction which is opposite to the direction of rotation of the transport cylinder[latter]. Because[By means] of this displacement, the signature

21 which is held by the spur strip 16", has been shifted slightly in a direction that is also [shifted] opposite the direction of rotation of the transport cylinder 11. This shifting is in comparison to the position in which the signature 21[it] had been cut off the inner web 03 in the first cutting gap 08. Following its[the] passage through the second cutting gap 09, the spur strip 16" returns to[into] the extended position shown in dashed lines, or even extends[changes] to a further extended position in order to cancel, or to overcompensate for, the prior rear displacement of the signature 21[in this way]. A small gap 26 is formed[created] in this way between the signature 21 and a previous signature 27 which had been cut off immediately prior to this, and into which small gap 26 the cutter 14 of the second cutting cylinder 13 can extend and can, in this way, press the outer[inner] web 04 against the stop 33 and can sever it, without the danger arising of again cutting one of the previously cut signatures 21, 27.

[028] Fig. 3 shows an alternative embodiment of the transport cylinder 11 and of the cutting cylinder 13, in accordance with the present invention, in a partial cross-sectional view that is analogous to the view[that] of Fig. 2. In connection

with each cutter 14, the cutting cylinder 13 has a strip 28, which projects past the[its] outer circumference of cutting cylinder 13 and which passes through the cutting gap 09 [respectively] shortly ahead of the respective associated cutter 14. A complementarily shaped groove 29 is formed in the transport cylinder 11, and is located opposite the strip 28 during each gap passage. The[, so that the] strip 28 thus presses a trailing edge area of the first signature 27, which was cut off the inner[outer] web 03[04], as well as the outer web 04, into the groove 29. The trailing edge of the previously cut signature 27 is pulled ahead by this and the gap 26[27] is opened. Therefore, with this embodiment of the present invention, it is not necessary for the spur strip 16" to pivot outward again after its passage through the cutting gap 09 in order to form[for creating] the gap 26.

[029] A third preferred embodiment of the present invention is represented in Fig. 4, again by the use[means] of a partial cross-sectional view taken through the transport cylinder 11 and the cutting cylinder 13. The cutting cylinder 13 is identical to the one depicted in Fig. 2. The[, the] transport cylinder 11 differs from the prior ones by the arrangement of the shafts 22 around which the spur strips 16

are pivotable. In[While in] the embodiments in accordance with Figs. 2 and 3, these shafts 22 are located ahead of the spur needles 23, in the direction of rotation of the transport cylinder. These shafts 22[, they] are arranged behind the spur needles 23[these] in the embodiment shown in[of] Fig. 4. The orientation of the spur needles 23, in relation to the surface of the transport cylinder 11, is the same in all cases. The spur needles 23[, they] are [slightly]inclined slightly forward, and in the direction of rotation of the transport cylinder 11, with[in] respect to a[the normal surface] line that is normal to the cylinder surface. A[, so that a] tension that is acting on the material which is speared or impaled on the spur needles 23 keeps the material[them] pressed against the surface of the transport cylinder 11.

[030] A changed course of the pivot movement of the spur strips, which are here identified by 16*, 16**, 16***, results from the changed arrangement of the shafts 22. The spur strip 16*,[.] which is still situated at a[far] distant that is relatively far from the cutting gap 09, is in a position in which it is comparatively only slightly[little] extended, in which its spur needles 23 extend only far enough

past the circumference of the transport cylinder 11 to hold[for holding] the inner web 03. The spur strip 16* is [farther] extended further only shortly before it reaches[reaching] the second cutting gap 09₁ in order to also be able to puncture the outer web 04, which positioning can be perceived at the spur strip 16**. With this embodiment₁ the upward or rapidly outward movement of the spur needles 23 causes a shifting of their intersection with the circumference of the transport cylinder 11 in a direction that is opposite to the direction of movement of the transport cylinder 11. Therefore,[latter and therefore] the movement of the leading edge of the signature 21 which is held by the spur strip 16** is away from the impact point of the cutter 14 on the stop 33. In opposition[contrast] to this, the spur needles 23 of the spur strip 16*** have been retracted a short distance into the transport cylinder 11 in order to [thus] move the signature 27 they are holding forward in the circumferential direction and in this way to open the resultant gap 26 that is provided at the location[height] of the stop 33.

[031] With this third embodiment₁ several direction changes of the movement of the spur needles 23₁ in the course of the revolution of the transport cylinder 11₁

are avoided.

[032] A fourth embodiment of the cutting device in accordance with the present invention is represented in Fig. 5, again in a partial cross-sectional[plan] view analogous to Fig. 4.

[033] In this fourth embodiment, segments 32', 32" ..., are arranged on the circumference of the transport cylinder 11 with each such segment 32', 32"" ..., being located respectively between two successive spur strips 16', 16", 16"" ..., and are used for increasing the circumference of transport cylinder 11. Each one of these segments 32', 32" is comprised[composed] of a plurality of flexible disks, which are arranged side-by-side in the axial direction of the transport cylinder 11 and which are spaced apart by gaps. In the course of the passing of the finished cut signatures 21, 27 on to the folding rollers 17, 18[19], these gaps are used as the outlet openings for tines of a folding blade, which is [(]not specifically represented[)]. The ends of each of the disks 32', 32'"" ..., are anchored on head strips 31, which head strips 31 can be shifted in the circumferential direction of the transport cylinder 11.

[034] The segment 32' is in a configuration wherein the course of its disks corresponds to the cylindrical shape of the transport cylinder 11. After each such [a]segment 32' has passed through the cutting gap 09, its head strips 31 are shifted circumferentially toward each other, so that its disks form a protrusion that is extending beyond the circumference of the transport cylinder 11, as is shown by the depiction[means] of the segment 32". Because of this protrusion, the distance between the spur strips 16" and 16"', as measured along the outer circumferential surface of the transport cylinder 11, is greater than the corresponding distance[one] between the spur strips 16' and 16", wherein the latter distance corresponds to the length of the signatures 21, 27 that are formed[created] at the cutting gap 06. Therefore, the bulging of the segment 32" causes the formation[creation] of the gap 26 between the signatures 21 and 27, into which gap 26 the cutter 14 of the second cutting cylinder 13 can extend.

[035] The second cutting cylinder 13 is arranged adjacent[on] the circumference of the transport cylinder 11 so that it cuts in a phase-shifted manner.

[036] The cut of the second cutting cylinder 13[12] on the transport cylinder 11 takes place close to, in particular 10 mm, next to the other cut of the first cutting cylinder 12[13].

[037] The cutting cylinders 12 and 13 are arranged sequentially in the circumferential direction on the transport cylinder 11.

[038] Fig. 6 shows a schematic side elevation[lateral] view of a portion of an alternative preferred embodiment of the wheel folding apparatus in accordance with the present invention, wherein the cutters 14 are arranged on the transport cylinder 11. The circumference of the now cutting and transport cylinder 11 corresponds to more than five, and preferably corresponds to seven lengths of the signatures 21, 27. It supports more than five, and preferably supports seven cutters 14, which are evenly distributed over its circumference and, in its movement direction, which is a [(]rotation in a counterclockwise direction in Fig. 1[)],]. The cylinder 11 also carries a holding device 16, such as, for example, a spur strip 16, closely behind each cutter 14. Such a spur strip 16, which is pivotable around the shaft 22 and which carries spur needles 23, is represented,

in an enlarged view, in Fig. 7 at the moment of its passage through the cutting gap 08 formed by the cooperation of the cutting and transport cylinder 11 with a first[06 in the] counter cylinder 34.

[039] Each one of the two identically constructed first and second counter cylinders 34 or 36 has a circumference corresponding to at least one, and preferably to two lengths of signatures 21, 27 to be produced from the webs 03, 04. Each cylinder 34 or 36[It] supports at least one, and preferably supports two counter-cutting strips, such as, for example, hard rubber strips, that are sunk into its circumferential surface, and which are used as stops 33 for the cutter 14. Each cylinder 34 or 36 also has[, as well as] a groove 24 which is located closely behind each stop 33 and which is utilized for receiving the tips of the spur needles 23 of the spur strips 16 which had been extended past the circumference of the cutting and transport cylinder 11 during the passage of the spur strips 16 through the cutting gap 08 or 09.

[040] In the position of the wheel folding apparatus that is represented in Fig. 6, a cutter 14 of the cutting and transport cylinder 11 and a stop 33 of the first

counter cylinder 34 just pass through the first cutting gap 08 and in the process cut through the inner web 03. A[The] leading edge of the inner web 03, which has been formed[being created] by this cutting, has been speared on the spur needles 23 of a spur strip 16, which had been extended shortly before reaching the cutting gap 08. These spur needles 23 of the extended spur strip 16[, which] continue to hold the newly formed leading edge of the inner web 03[it] firmly during its further transport on the surface of the cutting and transport cylinder 11.

[041] The signature 21, which has been cut off the inner web 03 in this way, is further conveyed on the cutting and transport cylinder 11 to the second cutting gap 09, where the outer web 04 is placed on top of it. This outer web 04[,] is also speared by the spur needles 23 of the spur strip 16 and is cut by the same cutter 14. Since the cutters 14 and the spur strips 16 do not move with respect[in relation] to their circumferential location on the cutting and transport cylinder 11 between the time of their passage through the first cutting gap 08 and the second cutting gap 09, there is no danger that the signatures 21, which had been cut off the web 03 in the first cutting gap 08, will be cut again during their passage

through the second cutting gap 09.

[042] At the locations of the first and second cutting gaps 08 and 09, the tips of the spur needles 23, as is shown in [(see] Fig. 7[)], extend farther past the circumference of the cutting and transport cylinder 11 than do the cutters 14. This is done in order to assure that the spur needles 23 have[they] already[have] penetrated through the webs 03 or 04 before the latter are being cut by the cutter 14.

[043] The angular distance between the two cutting gaps 08, 09 is approximately 50° in the example represented in Figs. 6 and 7[here]. This angular distance can differ from an[the] angular distance between the spur strips 16 from each other, which is preferably [(]51.5°[)], or a multiple thereof, so that cutting is not performed simultaneously at both cutting gaps 08, 09. Even[; even] a half-number multiple of this value is disadvantageous from the point of view of avoiding vibrations.

[044] Following its[the] passage through the cutting gap 09, each spur strip 16 supports a total product which is comprised respectively [composed] of a

signature 21 cut off from the inner web 03 and a signature 27 cut off from the outer web 04. Seven products are formed[created] with each revolution of the transport cylinder 11, the same as if both webs 03, 04 had been brought along in the customary manner via a common inlet 01, or 02. Since[But since] the cutting off of each individual signature 21, 27 is spread over two cutting steps at the first and second cutting gaps 08, 09, the force which must be employed in each cutting step is less. Accordingly,[, and] satisfactory, even running of the machine can be more easily maintained, and the demands made on the mechanical load-bearing capability of the cutting device are less than if both webs[they] were fed in via a common inlet 01, 02.

[045] Furthermore, at least five, and preferably seven folding blades, which are not specifically represented in Figs. 6 and 7[the drawing figure], are attached to the cutting and folding cylinder 11 and which folding blades, each time they reach a folding gap 19, that is formed between two folding rollers 17 and 18 which are placed in a contactless manner against the cutting and transport cylinder 11, are extended for use in transferring the products that are being transported on the

cutting and transport cylinder 11 into the folding gap 19 in a manner which is generally known[per se], and fold them. The now folded products pass through the folding gap 19 and, in a generally known manner, fall onto a paddle wheel, which is also not represented in the drawings[,] since it is known, and are placed by it on a conveyor belt.

[046] A modified embodiment of a[the] cutting device in accordance with the present invention differs from the one represented in Fig. 6 in that it has only a single inlet 02 for a single web 04 to be cut. Reference is made to Fig. 6 in describing this embodiment[it], wherein the first inlet 01, the inner web 03 and the first counter cylinder 34 are assumed not to exist.

[047] It is possible that each one of the webs 03, 04 has identical patterns A and B one behind the other, or[i.e.] in the transport direction. Preferably, these patterns A and B are printed by at least one forme cylinder of a printing unit, that is not specifically shown and which carries two identical patterns A and B on its circumference. The webs 03, 04 are conducted on top of each other, so that signatures with patterns A and B resting on top of each other are formed[created],

each of which signatures is moved to the folding gap 19. To this end, it is not absolutely necessary for the transport cylinder 11 to have an odd division of its circumferential surface. Instead, [and instead] it can also have an even division, which preferably is greater than 4 or 6.

[048] Preferably, each of the patterns A, B, C, D identifies two newspaper pages, wherein A1, A2, B1, B2, C1, C2, D1, D2 each identify one newspaper page. At least one web 03, 04 is to be understood by the identification web 03, 04. However[, however], preferably this is to be understood as a continuous web consisting of several webs 03, 04 placed on top of each other.

[049] In this case, the webs 03, 04 can each be imprinted by forme cylinders of printing units which either have a pattern A or B on the circumference, which is a [(single circumference)], or which have two patterns A or B on the circumference, which is a [(double circumference)]. In the case of double circumference forme cylinders, two identical patterns A, A and B, B, or two different patterns A, B can be arranged on the forme cylinder circumference.

[050] Therefore, four modes of operation are possible, when employing the

wheel folding apparatus in accordance with the present invention.

[051] In a first and second mode of operation, both of the webs 03, 04 are brought together upstream of the first inlet 01 on the transport cylinder 11 and are cut by the use[means] of a single cutting process.

[052] In a first mode of operation, the webs 03, 04 here each have the same patterns A or C, as can be seen in Fig. 8. The result is that[, and] identical products are formed, one behind the other, on the transport cylinder 11 during each revolution and are directly delivered to the folding gap 19.

[053] In a second mode of operation, that is corresponding to a collection operation, the webs 03, 04 each have alternating patterns A, B or C, D, respectively, situated one behind the other, as is represented schematically in Fig. 9, which patterns, in the course of a first revolution, are alternatingly deposited on the transport cylinder 11, which now acts as a [(=] collection cylinder[)], and which cylinder is provided with an odd number of fields. Fields of the transport cylinder 11, which carry signatures with only patterns A, C, move past the folding cylinders 17, 18 without the signatures being delivered into the folding gap 18. During a

second passage of each such [a]field past the inlet 01, it is additionally loaded with signatures with the patterns B, D. Only then are all four signatures delivered together to the folding gap 19.

[054] In [a]third and fourth modes of operation, the two webs 03, 04 are separately fed to the transport cylinder 11 via the inlet 01, 02.

[055] In the third mode of operation, the webs 03, 04 carry patterns A, B or C, D alternatingly one behind the other in accordance with the representation shown in Fig. 9.

[056] In this third mode of operation[case], and in the course of a first revolution of the transport cylinder 11, which is functioning as a [(=]collecting cylinder[)], a first field of the transport cylinder is loaded with a signature with the pattern A at the inlet 01, and with a signature with the pattern C at the inlet 02, so that every second spur strip 16 carries signatures with the patterns A, C when passing the folding cylinders 17, 18, and passes the folding cylinders 17, 19 [cylinders] without delivering the signatures. In the course of a second revolution, two signatures with patterns B, D from the webs 03, 04 are then [again]conducted

on the spur strips 16 which had previously received the patterns A,C.

[057] Therefore, during the second revolution of the transport cylinders 11, signatures with patterns A, B, C, D on the spur strips 16 alternate with spur strips 16 which only carry signatures with the patterns A, C, or B, D wherein the finished products, consisting of four signatures with patterns A, B, C, D of each second field are transferred to the folding gap 19.

[058] In a fourth mode of operation, the webs 03, 04 have the same patterns A, A, or C, C in succession, as is shown in Fig. 8, so that during each revolution of the transport cylinders 11 each spur strip 16 picks up signatures with the patterns A, C, which are directly transferred to the folding gap 19 when it is reached.

[059] In a further preferred[exemplary] embodiment of the present invention, as seen in Fig. 10., the transport cylinder 11 has three holding devices 16, which preferably are provided as spur needle sets 16. Two folding blades have been arranged in the transport cylinder 11. These two folding blades are rotatably arranged on a rotatable support and are positioned inside a[the] shell surface of the transport cylinder 11. This support for the two folding blades is arranged

eccentrically with[in] respect to the axis of rotation of the shell surface of the transport cylinder 11. The folding blade support[and] rotates at a relative speed with[in] respect to the shell surface of the transport cylinder 11. Two cutting arrangements are assigned to this transport cylinder 11, so that two cutting gaps 08, 09, which are arranged circumferentially offset, are provided on the circumference of the transport cylinder 11.

[060] Each of these two cutting arrangements has rotatable cylinders 12, 13, or 34, 36, which are both[either] provided either with at least one cutter 14 or with at least one stop 33 for a cutter 14 generally in the manner as has been described previously.

[061] If the two cylinders 12, 13 have cutters 14, cooperating stops 33, and preferably three such stops 33, are arranged on the transport cylinder 11. If[But if] the cylinders 34, 36 have stops 33, then cooperating cutters 14, and preferably three such cutters 14, are arranged on the transport cylinder 11.

[062] While preferred embodiments of a rotary folder comprising a cutting device for cross-cutting at least one web in accordance with the present invention have

[WO 2004/096687]

[PCT/EP2004/050656]

been set forth fully and completely hereinabove, it will be apparent to one of skill in the art that various changes in, for example, the drives for the cylinders, the types of presses used to print the webs and the like could be made without departing from the true spirit and scope of the present invention which accordingly is to be limited only by the appended claims.

WHAT IS CLAIMED IS:

[List of Reference Symbols

- 01 Inlet
- 02 Inlet
- 03 Web of material, web, first, inner, paper web
- 04 Web of material, web, second, outer, paper web
- 05 -
- 06 Traction roller pair
- 07 Traction roller pair
- 08 Cutting gap, first
- 09 Cutting gap, second
- 10 -
- 11 Transport cylinder, folding blade cylinder
- 12 Cutting cylinder, first, counter cylinder,
first
- 13 Cutting cylinder, second, counter cylinder,
second
- 14 Cutter
- 15 -
- 16 Means, holding device, spur strip
- 17 Cylinder, folding roller
- 18 Cylinder, folding roller
- 19 Gap, folding gap
- 20 -
- 21 Signature, first
- 22 Shaft
- 23 Spur needles
- 24 Groove
- 25 -
- 26 Gap
- 27 Signature, second]

[WO 2004/096687]

[PCT/EP2004/050656]

- [28 Strip
- 29 Groove
- 30 -
- 31 Means, segment head strip
- 32 Means, segment
- 33 Stop
- 34 Counter cylinder, first
- 35 -
- 36 Counter cylinder, second]